


P	2	3	4	5	6	7	8	9	10	11	12	13
U	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
V	7.7	11.2	14.7	18.2	21.7	25.2	28.7	32.2	35.7	39.2	42.7	46.2
P	14	15	16	17	18	19	20	21	22	23	24	
U	45.5	49.0	52.5	56.0	59.5	63.0	66.5	70.0	73.5	77.0	80.5	
V	49.7	53.2	56.7	60.2	63.7	67.2	70.7	74.2	77.7	81.2	84.7	

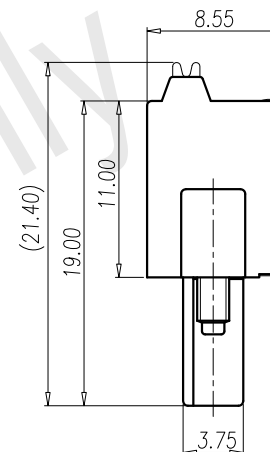

NOTES 1:


- UL Standard :
1. Rating: 300V 8A
  2. Insulation Withstands Voltage: AC 2000V at 1 minute
  3. Using Temperature Range: -40°C~+115°C
  4. Suitable Electric Wire: AWG 28 ~ 16

IEC Standard :

1. Rating: 630V 15A
2. Rate Impulse Voltage: 4000V
3. Insulation Resistance: 500MΩ or more at DC500V
4. Material Group: I
5. Pollution Degree: 2
6. Overvoltage Category: II
7. Using Temperature Range: -40°C~+120°C
8. Suitable Electric Wire: 0.2~1.5mm<sup>2</sup>

NOTES 2:

1. RoHS compliance
2. Strip length: 8~9mm

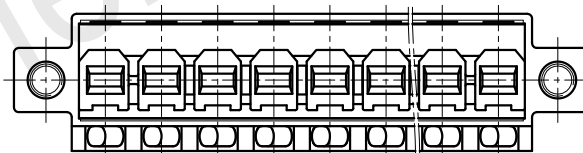

7	SCREW	STEEL	M2/Zn Plated
6	LEVER	POM	ORANGE
5	LIGHT BAR	PC	TRANSPARENT
4	S-CAGE	STAINLESS STEEL	
3	CLAMP	COPPER ALLOY	Tin Plated
2	COVER	PA	UL94-V0 BLACK
1	HOUSING	PA	UL94-V0 BLACK
ITEM	NAME OF PART	MATERIAL	NOTES

Total Pitch Tolerances		Normal Dimension Tolerances	
0~30	±0.20	0~30	±0.25
over 30~53	±0.25	over 30~53	±0.30
over 53~70	±0.30	over 53~70	±0.35
over 70~90	±0.35	over 70~90	±0.44
over 90~115	±0.44	over 90~115	±0.55
over 115~150	±0.55	over 115~150	±0.70
over 150~200	±0.70	over 150~200	±0.85
over 200~250	±0.85	over 200~250	±1.00
over 250~320	±1.00	over 250~320	±1.20

DWG.	LWF	DATE	16.07.28	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	3:1 ( : )		
APP.		DATE		NAME	0225-01XX		
REV.	CONTENT	CHK.	DATE	DINKLE ENTERPRISE CO., LTD	DWG NO.	SP-03-02250100	